




Loft Roll Ultra

ODE Loft Roll is a glass mineral wool roll with a superior thermal performance of 0.042, designed to be installed in cold loft spaces at ceiling level.

The roll can be pre-cut at 570 mm or 380 mm for ease of installation between ceiling joists.

Key Performances and Benefits

Reaction to Fire classification	A1 non-combustible to EN 13501-1
Thermal conductivity (W/mk)	0.042
BREEAM	A+ rating according to BRE Green Guide
Recycled content	Manufactured from >80% recycled glass
Easy installation	No tear, low wastage, pre-cut for easy fit between joists
Long Life	Does not degrade, decompose, or become mouldy over time

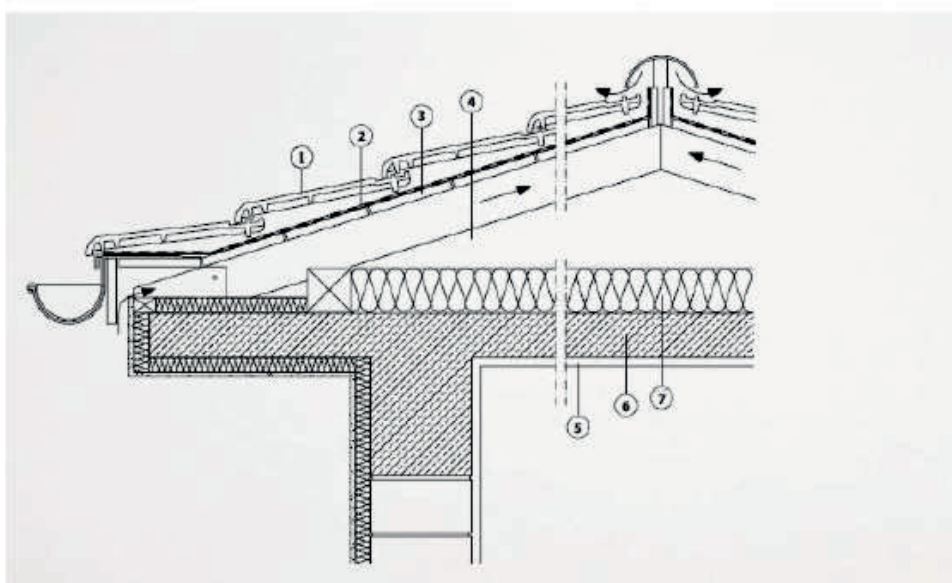

- 1 - Roof Covering
- 2 - Waterproofing
- 3 - Roof Board
- 4 - Ventilated Attic Space
- 5 - Ceiling
- 6 - Floor Panel
- 7 - Insulation Material


Specifications

Thickness mm	Thermal Conductivity (W/mk)	Length M	Width mm	M2 Per Pack	Packs Per Palet
100	0.042	7.2	1200	8.64	32
150	0.042	7	1200	8.4	24
200	0.042	6	1200	7.2	24
100	0.042	9.5	1140 (2x570 or 3x380)	10.83	24
150	0.042	7	1140 (2x570 or 3x380)	7.98	24
200	0.042	6	1140 (2x570 or 3x380)	6.84	24

Hyperpack Palletized Packaging

Thanks to the hyperpack packaging system, ODE Starflex glass wool facilitates:

- ☐ Loading more product per volume
- ☐ Loading and unloading using transpallet
- ☐ Minimum stocking cost
- ☐ Can be stored outdoors

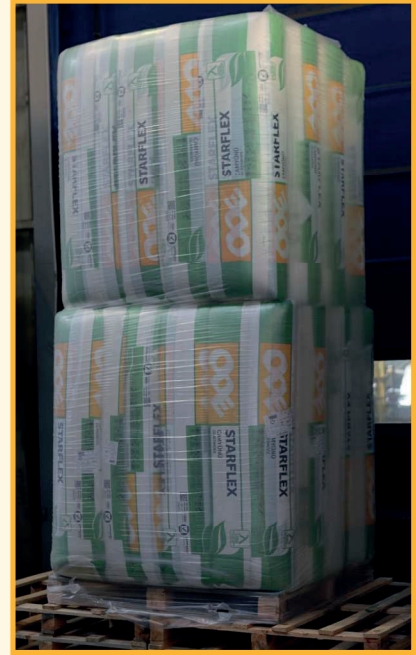

More information and certification documents at www.ode.com.tr/en

ISO 27001

ISO 9001

ISO 14001

ISO 50001

ISO 45001

