


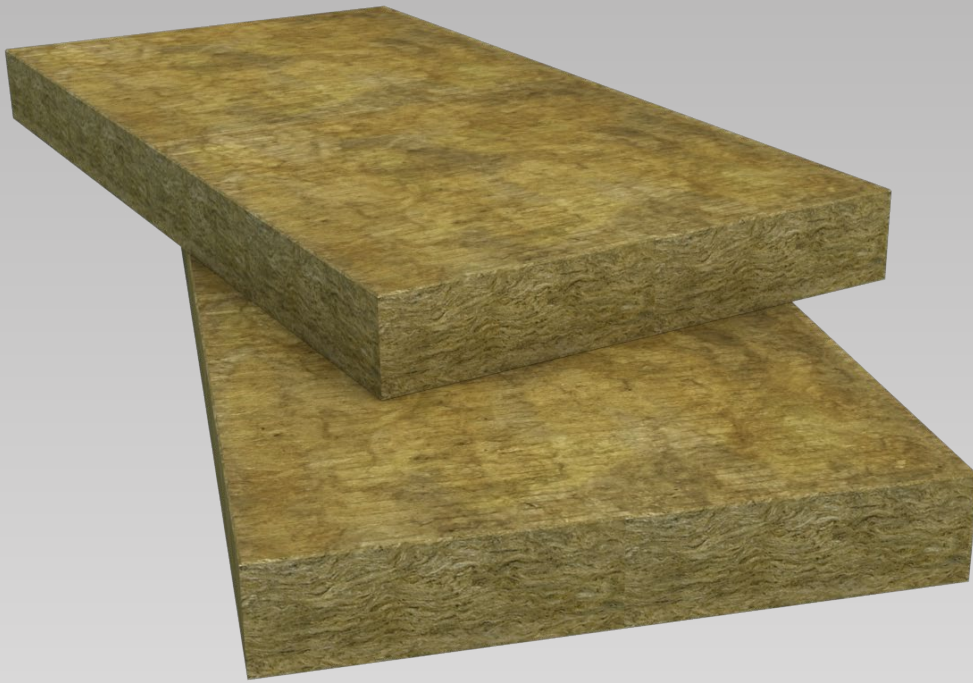

NyRock® Frame Slab 032

Non-combustible stone wool insulation designed specifically for use within timber and steel frames.

NyRock® Frame Slab 032 is a semi-rigid stone wool insulation slab designed specifically for use between the studwork of external timber or light gauge steel frame walls.

The slabs deliver insulation with a low thermal conductivity, manufactured in accordance with BS EN 13162:2012 + A1:2015.

Manufactured using NyRock technology, NyRock Frame Slab 032 increases the density of air pockets trapped within each slab. This results in an improved thermal performance when compared to traditional stone wool products.

- Low thermal conductivity of 0.032 W/mK.
- NyRock Frame Slab 032 is able to resist temperatures of over 1,000°C achieving the highest Euroclass A1 non-combustibility classification as defined in EN 13501-1.
- The dimensional stability means the slabs will not slump or sag after installation.
- The slabs come in 570mm (timber) or 600mm (steel) widths.



Low lambda non-combustible stone wool insulation designed specifically for use within timber and steel frame constructions.

NyRock Frame Slab 032 is manufactured using NyRock technology.

NyRock Frame Slab 032



APPLICATIONS

NyRock Frame Slab 032 has been designed to fit into the standard size 600mm studs, of external timber or steel frame walls. Stone wool insulation is dimensionally stable, meaning that it keeps its shape over time, despite changes in temperature or humidity. With its dense fibre structure, NyRock Frame Slab 032 fits into frame walls, limiting the need for cutting, which helps to reduce waste.

PERFORMANCE

Thermal performance

Tested to BS EN 13162:2012 + A1:2015 achieving a thermal conductivity λ value of 0.032 W/mK.

Fire performance

NyRock Frame Slab 032 is non-combustible achieving a reaction to fire classification of A1, as defined in EN13501-1.

Acoustic performance

The non-directional fibre orientation and density of ROCKWOOL stone wool helps absorb sound waves and dampen vibrations, reducing the transmission of external noise when used in external wall applications.


When used within an external wall consisting of a rainscreen facade, in combination with NyRock Rainscreen 032, NyRock Frame Slab 032 can deliver acoustic results as high as R_w 60dB in a typical wall system, as demonstrated by independent in-situ laboratory testing.

NyRock Frame Slab 032

Application performance

Timber frame external wall with brick finish / insulation between the studs, without service void:


Timber Frame Slab (mm)	Stud depth	U-value (W/m²K)	Vapour control layer		Breather membrane	
			Standard	Standard	Tyvek Reflex	Protect TF200 Thermo
140	140	0.27	✓	✓		
140	140	0.24	✓		✓	
140	140	0.23	✓			✓

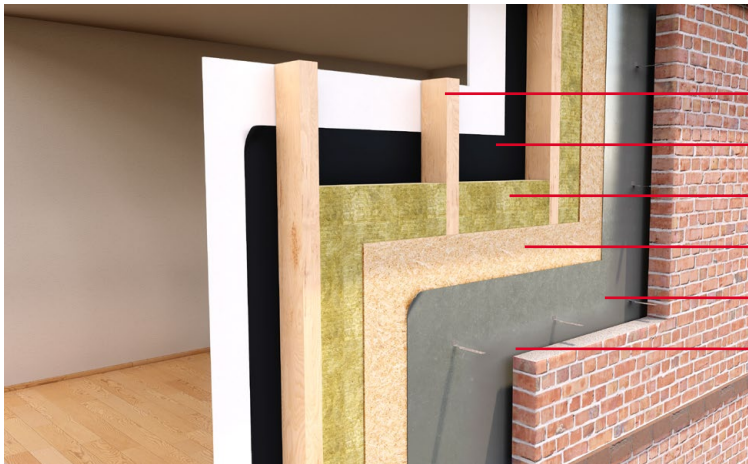

- Timber stud
- Vapour control layer
- NyRock Frame Slab 032
- OSB
- Breather membrane
- 50mm clear cavity

Insulation between the studs, with service void:

Timber Frame Slab (mm)	Stud depth	U-value (W/m²K)	Vapour control layer			Breather membrane		
			Standard	Tyvek AirGuard	Protect VC Foil Ultra	Standard	Tyvek Reflex	Protect TF200 Thermo
90	89	0.35	✓			✓		
90	89	0.27		✓			✓	
90	89	0.25			✓			✓
140	140	0.25	✓			✓		
140	140	0.21		✓			✓	
140	140	0.20			✓			✓

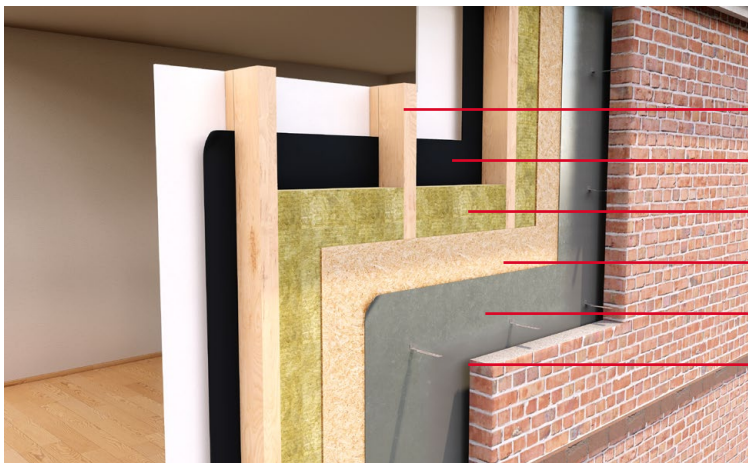


- Timber studs with 25mm service void
- Vapour control layer
- NyRock Frame Slab 032
- OSB
- Breather membrane
- 50mm clear cavity

NyRock Frame Slab 032

Steel frame external wall

Steel frame system / In-fill walling with rainscreen façade:


NyRock Frame Slab 032 (mm)	Stud depth	U-value (W/m²K)	NyRock Rainscreen 032 (mm)
150	150	0.14	190
150	150	0.15	170
150	150	0.16	150
150	150	0.17	125
100	100	0.15	200
100	100	0.16	180
100	100	0.17	160
100	100	0.18	145

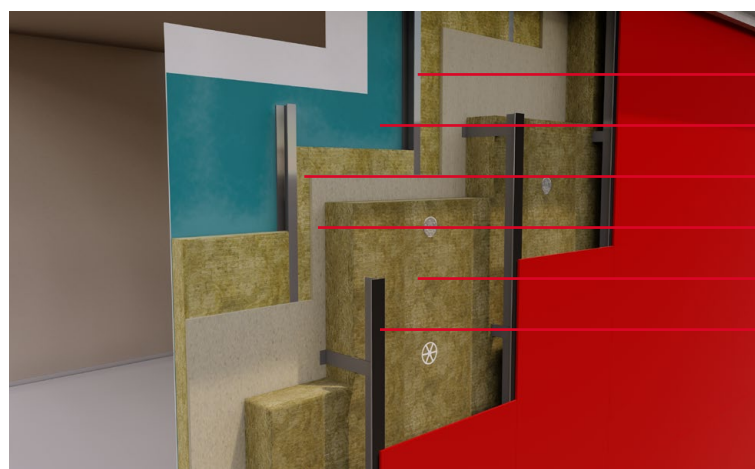

- Steel stud
- Vapour control layer
- NyRock Frame Slab 032
- Sheathing board
- NyRock Rainscreen 032
- Metal rainscreen bracket and angle system

Steel frame system with brick outer:

NyRock Frame Slab 032 (mm)	Stud depth	U-value (W/m²K)	NyRock Rainscreen 032 (mm)
100	100	0.25	50
120	120	0.24	50
150	150	0.22	50
100	100	0.17	100
120	120	0.17	100
150	150	0.16	100

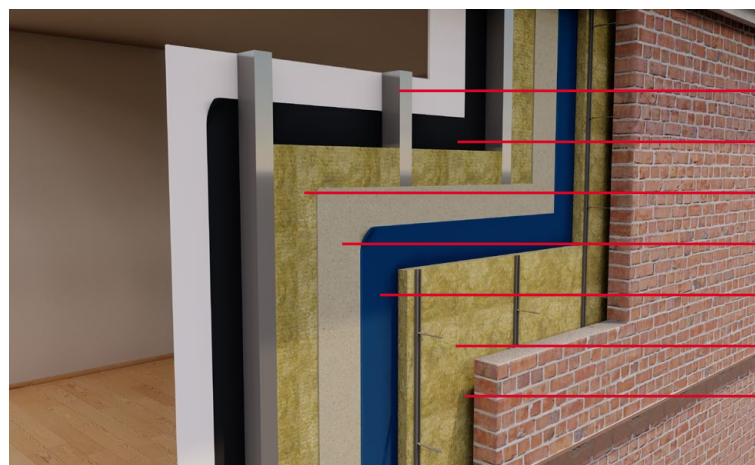

- Steel stud
- Vapour control layer
- NyRock Frame Slab 032
- Sheathing board
- Breather membrane
- NyRock Rainscreen 032
- 50mm clear activity

NyRock Frame Slab 032

PRODUCT INFORMATION

Thickness	Thermal resistance m ² K/W	Width (mm)	Length (mm)	Pieces/ pack	Area/ pack (m ²)	Packs/ pallet	Pieces/ pallet
-----------	--	---------------	----------------	-----------------	---------------------------------	------------------	-------------------

Timber application

90	2.81	570	1200	4	2.74	12	48
140	4.38	570	1200	3	2.05	12	36

Steel application

100	3.13	600	1200	3	2.16	16	48
120	3.75	600	1200	2	1.44	20	40
150	4.69	600	1200	2	1.44	16	32

ADDITIONAL INFORMATION

Durability

Tests of our stone wool recovered from old buildings have shown that it retains its performance characteristics – thermal, mechanical, fire resistance – for at least 50 years, and probably longer. A test of a 65-year-old stone wool sample found in 2023 during a renovation of Copenhagen airport showed that these characteristics had not diminished after 65 years.*

**Testing done at Danish Technical Institute (DTI) in 2023, "Testing ROCKWOOL insulation from CPH airport hangar 4"*

Water resistance and moisture

ROCKWOOL stone wool insulation is water repellent and non-hygroscopic, meaning it will not absorb water from the surrounding environment. It retains its thermal performance even in humid conditions, helping to support the durability of the building fabric.

Condensation

ROCKWOOL stone wool insulation is vapour permeable, reducing the risk of condensation, which can lead to rot, mould and humidity damage.

Vapour control and breather membranes – managing moisture

A vapour control layer is essential on the 'warm' side of the insulation and frame, to reduce the risk of condensation forming inside the building. Thermal benefits can be achieved by using vapour control membranes when they have a low emissivity reflective surface, and 20mm or more of non-ventilated air space. The benefit to the U-value can be seen in the performance tables.

The low emissivity R-values used in the calculations for the service zone are based on manufacturers' claims:

- Standard VCL = 0.180 m²K/W
- Tyvek AirGuard = 0.680 m²K/W
- Protect VC Foil = 0.780 m²K/W

Breather membranes

A vapour permeable membrane on the outside of the sheathing board is also necessary, this protects the timber frame from water penetration whilst allowing water vapour to escape. Again, enhanced thermal benefits are offered by reflective low emissivity membranes, where there is a clear air space of 20mm or more. The effect on the overall wall U-value can be seen in the tables.

The low emissivity R-values of the external cavity used in the calculations above are based on manufacturers' claims:

- Standard breather membrane = 0.180 m²K/W
- Tyvek Reflex = 0.540 m²K/W
- Protect TF200 Thermo = 0.770 m²K/W

Pencoed, Bridgend CF35 6NY

For more information visit rockwool.com/uk

Tel: (+44) 1656 862 621 • technical.solutions@rockwool.com

NyRock Frame Slab 032

STANDARDS AND APPROVALS

Certificate
Manufactured in accordance with BS EN 13162:2012+A1:2015 Thermal insulation products for buildings. Factory made mineral wool (MW) products. Designation code: MW-EN 13162-T4-WS-WL(P)-MU1.
Manufactured under ISO 14001 Environmental Management Systems, and ISO 9001 Quality Management Systems.



INSTALLATION

The product must be installed in accordance with the current ROCKWOOL guidelines. For further information please visit rockwool.com/uk or contact our Technical Solutions Team on 01656 868490.

SPECIFICATION CLAUSES

The following NBS clauses include NyRock Frame Slab 032:

P10
140
K10
145
155
165

NyRock Frame Slab 032

BUILDING SAFETY AND PRODUCT USE

LEGAL NOTICES

General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor®, Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2025.
All rights reserved.

Health and safety

A Material Safety Data Sheet is available and can be downloaded from rockwool.com/uk to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:
marketcom@rockwool.com

NyRock Frame Slab 032

Company:	ROCKWOOL Limited
Version:	Version 1.04 October 2025 (to check this is the latest version, please refer to rockwool.com/uk)
Revised on:	22.10.2025
Product name:	NyRock Frame Slab 032
Replaces version:	Version 1.03 August 2025
Changes made:	N/A
Additional information:	N/A

Please ensure you are using the latest version of this document by verifying it on our official website. Do not rely on printed or previously downloaded copies, as these may be out of date.

Please contact the ROCKWOOL Technical Support Team if you would like to access archived versions of this document.

NyRock Frame Slab 032

ROCKWOOL stone wool – safe to install and live alongside

There are no hazardous classifications associated with stone wool insulation manufactured by ROCKWOOL UK according to EU REACH and UK REACH regulations on health and the environment.

ROCKWOOL safe use instruction sheets and material safety data sheets (where applicable) can be downloaded [here](#).




Sustainability

ROCKWOOL products are used to help enrich modern living, supporting more resilient and comfortable buildings.

We transform abundant, natural volcanic rock into stone wool insulation products that help our customers tackle energy consumption, noise pollution, fire resilience, and climate change challenges such as water scarcity and flooding.

Since our stone wool is endlessly recyclable with no loss in its performance properties, we can take back clean, uncontaminated new off-cuts and unused ROCKWOOL stone wool insulation from construction sites in the UK. Our service, Rockcycle®, takes back our stone wool and recycles it back into production where it is used to make new ROCKWOOL products.

Our annual sustainability reports, which set out progress against our sustainability goals, and further details of the positive impacts of using our products can be found on our website.



Environment

ROCKWOOL takes a fact-based, auditable approach to documenting our progress in maximising our products' positive impact and minimising the effect our operations have on the environment, backed by third-party references and methodologies. Further details can be found online in our annual sustainability report.

Our high-tech production process uses filters, pre-heaters, after-burners and other cleaning and collection systems that help to reduce the effects of our manufacturing operations on the environment.

ROCKWOOL stone wool insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

